



# ONE PRINTER, TWO MODES BOTH DIRECT THERMAL AND THERMAL TRANSFER PRINTING

Stable performance

Affordable price


Compact Size and Portable mode

- With compact and space-saving design
- Fast printing speed 2inch/s-6inch/s
- large capacity
- Strong holder keeps the roll stable
- Can support 300 meters of ribbon, extend the printing cycle
- White design in printer body, More in line with the style as the scenarios in hospitals





# AIDE® Wristband Barcode Printer AD-P30

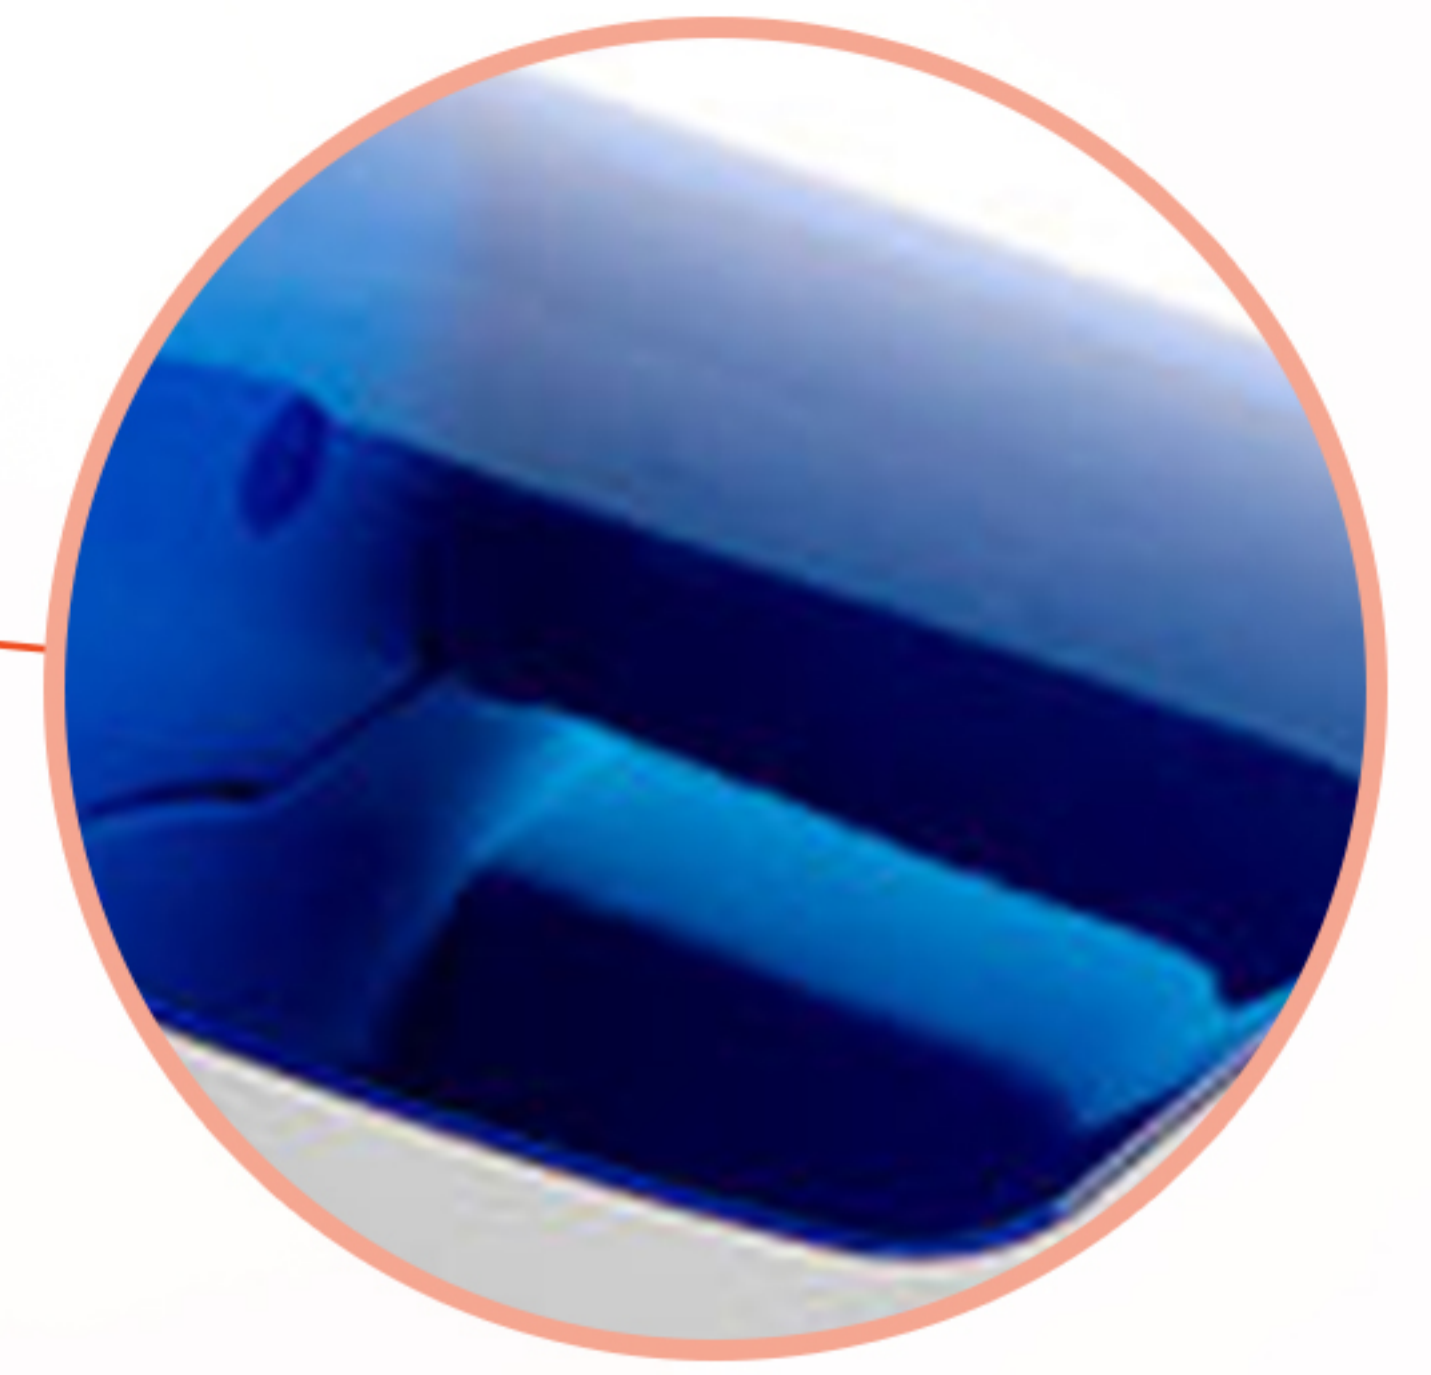


## Visual Window

User can quickly discover the roll diameter




## USB Interface Design

Reserved external label feeder

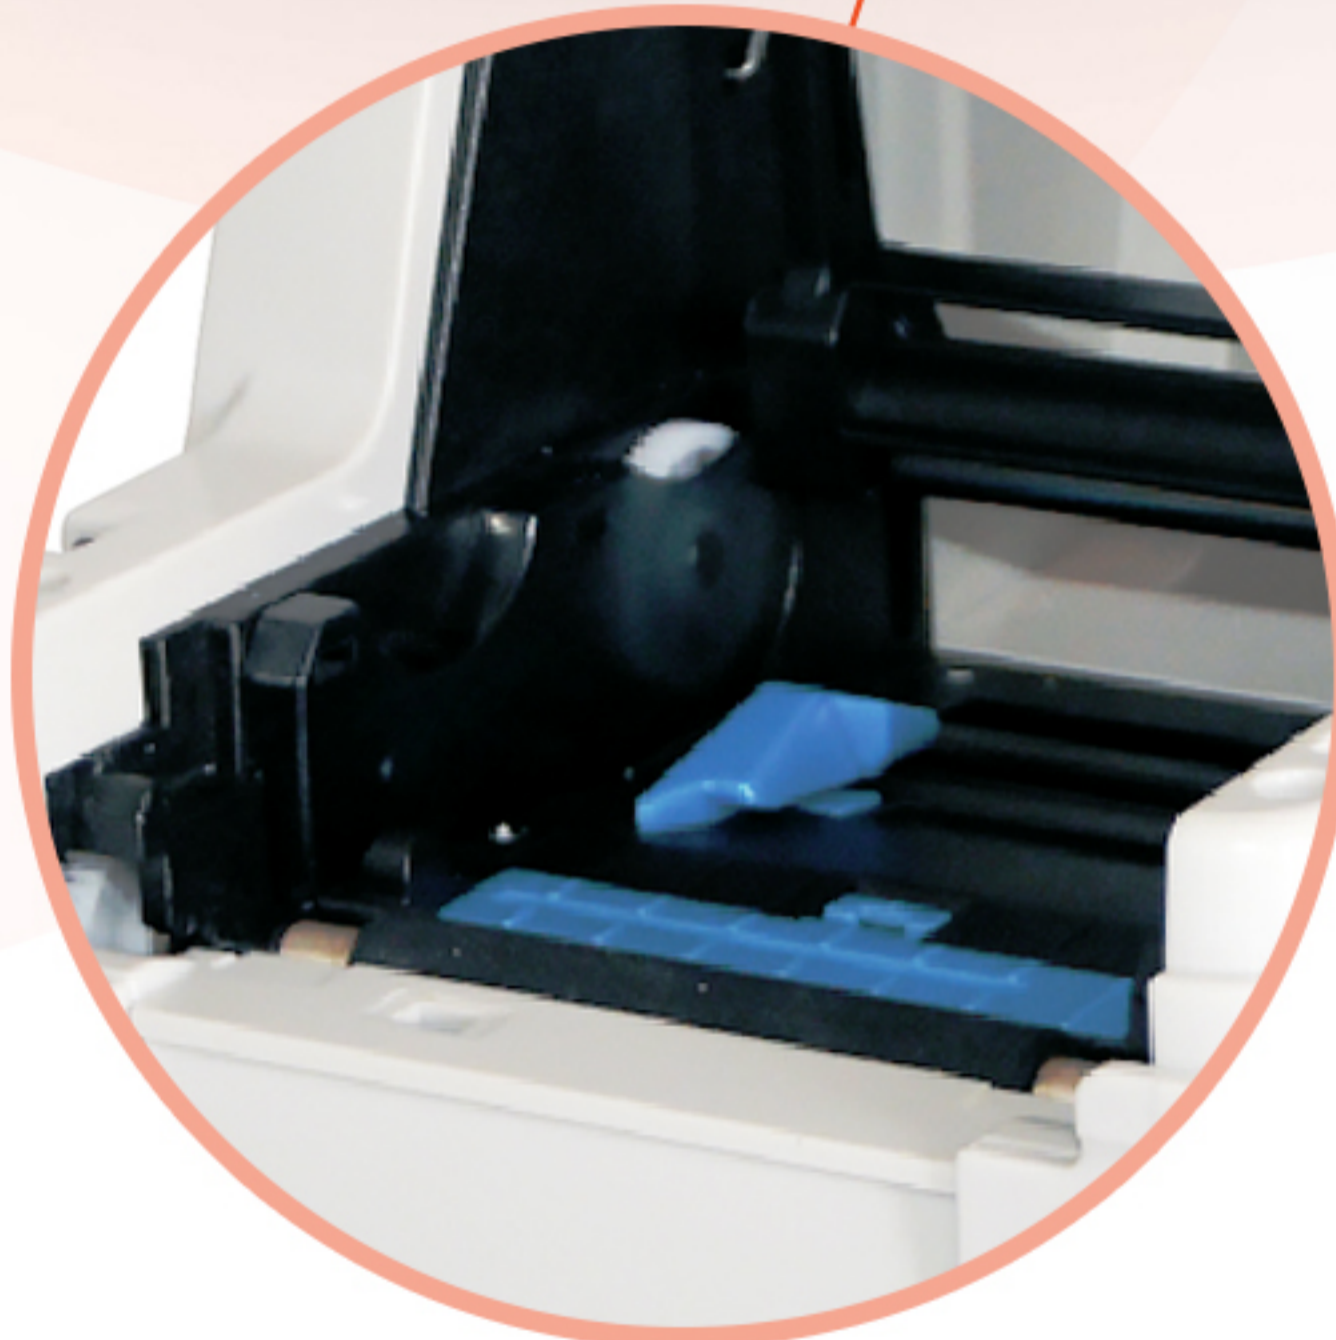

## Large Media roll capacity

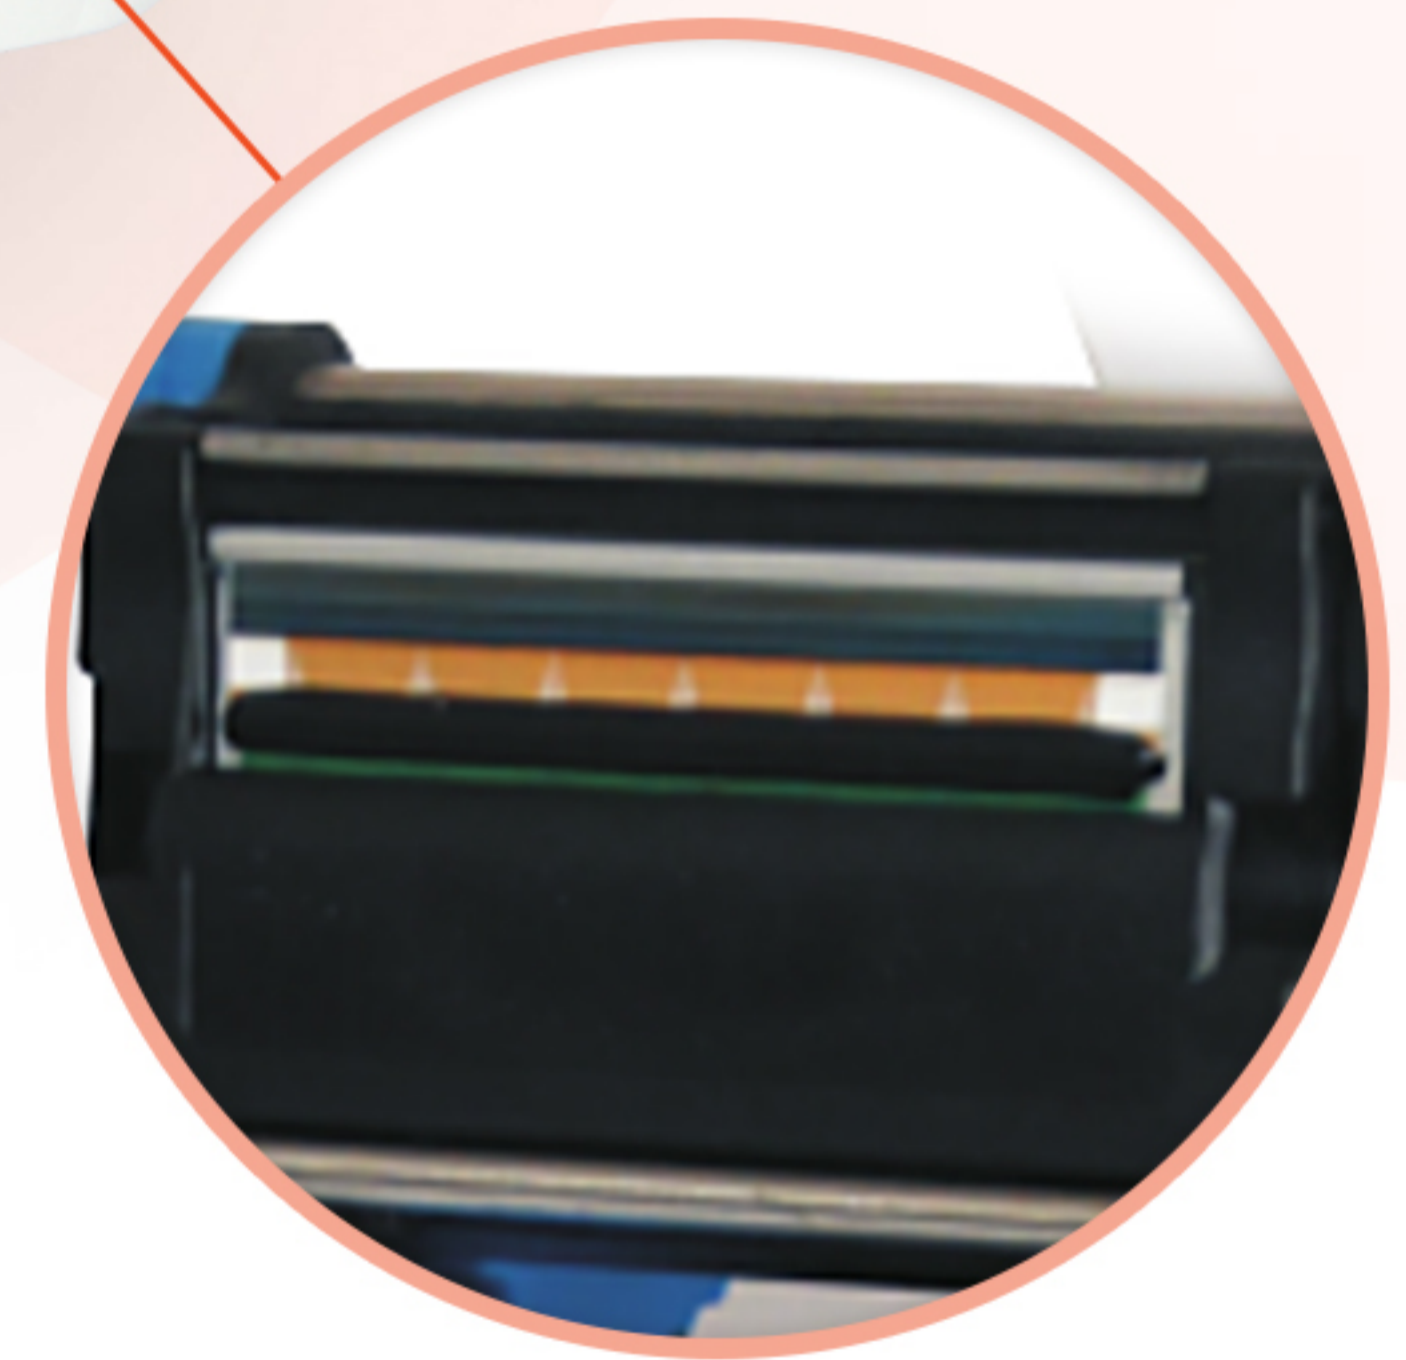

## 203DPI HD Print Head

Printing is clearly visible

Printer Specifications	Print Method	Thermal Transfer / Direct Thermal	Media Characteristics	Media Roll OD	127mm (5")
	Print Resolution	203 dpi		Media Type	Continuous, black mark, gap, punched hole, Fan fold and more labels
	Print Speed	2~6 inch/s (51-152mm/s)		Media Rolling Up Method	Printing side outward rolling
	Print Width	Max. 54mm		Media Width	Max.60mm (2.36") Min.20mm (0.78")
	Print Length	Max. 2286mm (90")		Media Thickness	Max. 0.254mm (10mil) Min. 0.06mm (2.36mil)
	Dot Density	203dots/inch (8dots/mm)		Media Roll Core Size	25.4mm~38mm (1"~1.5")
	Dot Size	0.125x0.125mm (1mm=8dots)		Media Gap	Min. 2 mm (0.09")
	Print Head	30KM		Label Length	10~2286mm (0.39"~90")
	Interface	USB (USB+Bluetooth, USB+WIFI optional)		Power supply	Input: AC 110V/240V Output: DC24V/2.5A, 60W
	Physical Memory	SDRAM: 8MB, FLASH: 4MB		Operation Condition	Temperature: 5~45°C (41~104°F), Humidity: 25~85%RH
	Media Sensor	Reflective and Transmissive Sensors (adjustable)		Storage Condition	Temperature: -10~50°C (-10~140°F), Humidity: 10%~90%RH
	Command set	Standard TSPL emulation, ZPL emulation optional		Printer Dimensions	280×160×170(W×D×H)
	Ribbon Characteristics	Ribbon OD		Max.67mm	Physical Characteristics
Ribbon Length		Max.300m	Accessories	Printer Weight	Approx. 1.72KG
Ribbon Core Size		1 inch (25.4mm)		External Media Holder	Optional
Ribbon Width		Max.60mm, Min.30mm			
Ribbon Rolling Up Method		Outward Rolling			